


American Pride - 526 Crest Road - Flat Rock, NC 28731
828-697-8847 Fax 828-697-7094

Product Data Specifications

Woodfield Model#96141CR1CA(Carolina), 96141CR1CL(Classic),
For Surface Mounted Cabinets Replace "R" with "S" EXAMPLE: 96141CS1CA

MIRROR: 14" x 20" Single Strength (.09375) CCE
OVERALL SIZE: 17-1/2" x 23-1/2" x 4"
ROUGH OPENING: 14" x 18 x 2.5" **STORAGE DEPTH:** 3.5"
SHELVES: 3 Fixed white styrene
HINGE: 2 Tri-brite Galvanized 2-1/2" Split Butt hinges
DOOR OPERATION: One stainless steel striker plate and magnetic catch closure mechanism
MOUNTING HARDWARE: 4 #8 x 1 1/2" Steel Tapping Screws 4 #10x2-1/2"for Surface
FRAME MATERIAL: 3/4" Solid Oak with a choice of 2 finishes Light to Medium
Carolina(CA), Classic(CL),
REVERSIBLE: Yes
DOOR BACKING: White High Impact Polystyrene .060 Thickness
CABINET: Injection Molded in White
For Surface Mount OD: 15.5" x 19.5" x 4"
Typical Wall Thickness .110 Material: High Impact Polystyrene
All Color Non-Toxic 1.5 Notched Izod (minimum)
Specific Gravity 1.05, 73 /28 F Heat Deflection Annealed, 264 psi 185
Vicat Softening Point, °F 202 °C 94
Tensile Strength at yield (2.0 in/min) psi 3400
Ultimate Elongation % (0.2 in/min)(5mm/min) 35
Flexular Modulus (0.05 in/min) psi 300,000 Hardness, Rockwell M 20
Izod Impact, 1/4" - 8.4 mm @ 78 F/23 C 1.4 ft.-lb. 75 J/m

96 (Standard, 1C or 1D) Plastic(Polystyrene) Recessed or Surface Mounted Cabinet

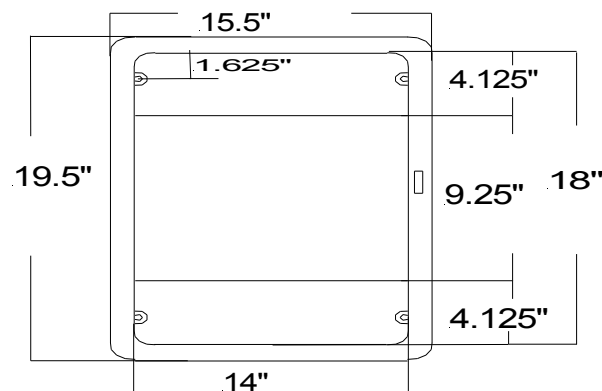

Storage Depth(3.5")
Covers up 15.5" x 19.5"
3 Fixed Shelves
R.O.(14" x 18"x 2.5")