


American Pride - 526 Crest Road - Flat Rock, NC 28731
(828)697-8847 Fax (828)697-7094

Product Data Specifications

Charleston-Model #9718RCA(Carolina) 9718RCL(Classic) 9718RHE (Heritage)
For Surface Mounted replace "R" with "S" Example: 9718SHE

Door:	20-7/8"x 31" Solid Oak oval frame finished in Carolina, Classic or Heritage
Mirror:	17-3/4" x 27-3/8" x 1/8" Double Strength Clean cut edge
Rough Opening:	14" x 18" With 3-1/2" storage depth and recesses 2-3/8" into the wall
Surface Mount:	Covers up to 15-1/2" x 19-1/2"
Door Catch:	Magnetic catch with riveted on stainless striker plate
Shelves:	2 adjustable polystyrene, 1 fixed
Hinges:	1 8" Tri-Brite galvanized piano hinge
Hardware:	All hardware is zinc plated(hinges, magnetic catch, screws & hardware pack)
Cabinet:	Injection Molded in White Typical Wall Thickness .110 Material: High Impact Polystyrene All Color Non-Toxic 1.5 Notched Izod(minimum) Specific Gravity 1.05, 73°/28° Heat Deflection annealed, 264 psi 185 Vicat Softening Point, °F 202 °C 94 Tensile Strength at yield (2.0 in/min) psi 3400 Ultimate Elongation %(0.2 in/min)(5 mm/min) 35 Flexular Modulus (0.05 in/min) psi 300,000 Hardness, Rockwell M 20 Izod Impact, 1/4" - 8.4 mm @ 78° F/23°C 1.4 ft.-lb 75 J/M

97 Series Plastic(Polystyrene) Recessed or Surface Mounted Cabinet

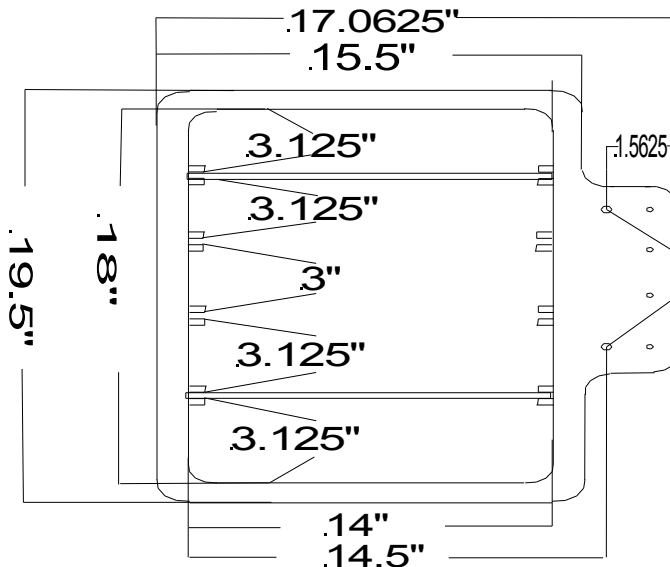

For Recessed Install
Use #10 x 2.5" Screws
Both screws should be
fastened to stud
For Surface Mounted Install
Use #10 x 5" Screws

Storage Depth(3.5") Covers up 15.5" x 19.5"
2 White Adjustable Polystyrene Shelves
1 Fixed White Polystyrene shelf
R.O.(14" x 18"x 2.375")
Requires 1/2" Offset

